


NEW

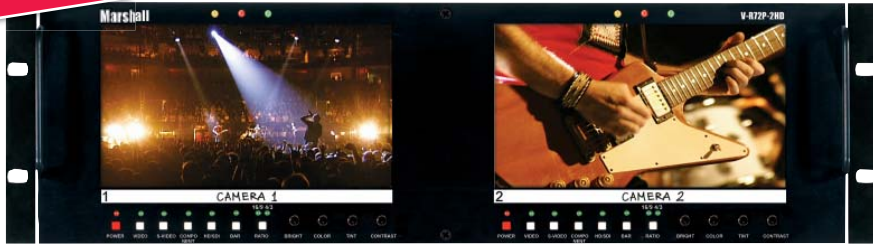

Price: \$3999.00

V-R72P-2HD Dual Multiformat HD/SD monitor set with 1.2 TFT-Megapixel displays

Display (Viewing area)	7" (6.14" x 3.27")
Resolution (Pixels)	800 H x RGB x 480 V
Dot Pitch	0.065 mm x 0.175 mm
Brightness (in cd/m ²)	380 cd/m ²
System	NTSC/PAL auto recognition for standard definition signals
Inputs per panel (total)	1(2) Composite, 1(2) S-Video, 1(2) Component HD/SD, 1(2) HD/SDI
Dimensions	19.125"W x 5.14"H x 2.5"D
Approx. Weight	5 lbs
Power Consumption	12 VDC, 3.0 Amps

Inputs

- Composite
- S-Video
- Component HD/SD
- HD/SDI


Unique 180° Tilt Mechanism

1.2 TFT MEGAPIXEL

The Rack mounted and tiltable **V-R72P-2HD** represents leading edge technology in LCD/TFT imaging for broadcast and professional video applications featuring High Resolution, megapixel, 1.2 TFT-Megapixel screens with completely digital signal processing. All SMPTE/ITU video standards and signal types are accepted and displayed on each screen of this model. Analog signals are digitized using an advanced 10 bit process on each signal path with 4x over sampling and adaptive 5 line comb filter with exacting color space conversion. All video formats are scaled to fit on screen in the highest resolution using a state of the art LSI that incorporates 4 x 4 pixel interpolations with precision Gamma correction to produce the best images available.

- High Resolution 7-inch 1.2 TFT-MegaPixel wide screen
- 100% digital processing
- Analog signals converted to 10 bit digital
- High resolution scaling of all images
- Wide viewing radius - 130° horizontal and 120° vertical provides superior visibility when the viewer is not directly in front of the screen
- 380 candelas per square meter (cd/m²) luminance produces enhanced image quality in varying light and viewing conditions
- 400:1 ratio of contrast between black and white luminance values with response rates less than 30 ms results in excellent quality for moving images
- 4:3 and 16:9 screen aspect ratios for DTV applications
- Works with all analog production formats and frame rates
- Blue Screen for color adjustment
- Easy to see three color tally indicators
- Built in Color Bars
- Adjustment Settings Memory
- Standard Multiformat inputs:
 - HD/SDI (all formats)
 - Component Analog HD/SD
 - Y/C (S-Video)
 - SDI (ITU-R BT601 format)
 - Composite Video PAL/NTSC
 - Loop through of all input signals

NEW

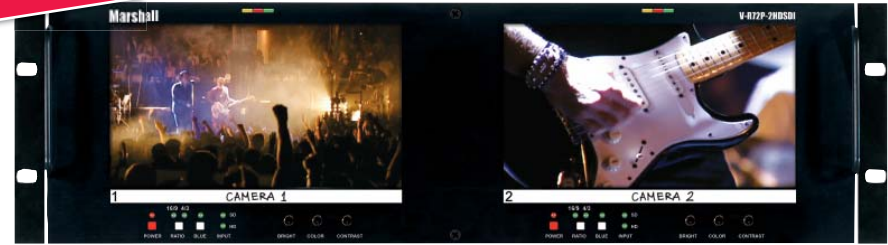

Price: \$2999.00

V-R72P-2HDSDI Budget Dual Screen HD/SDI monitor set with 1.2 Megapixel LCD displays

Display (Viewing area)	7" (6.14" x 3.27")
Resolution (Pixels)	800 H x RGB x 480 V
Dot Pitch	0.065 mm x 0.175 mm
Brightness (in cd/m ²)	380 cd/m ²
System	All HD/SDI and SDI Component Digital Signals
Inputs per panel (total)	1(2) HD/SDI
Dimensions	19.125"W x 5.14"H x 1.5"D
Approx. Weight	5 lbs
Power Consumption	12 VDC, 3.0 Amps

Inputs

- HD/SDI

Unique 180° Tilt Mechanism

1.2 TFT MEGAPIXEL

The Rack mounted and tiltable **V-R72P-2HDSDI** represents leading edge technology in LCD imaging for broadcast and professional video applications featuring High Resolution, 1.2 megapixel, TFT screens with completely digital signal processing. All SMPTE/ITU serial digital video standards and frame rates are accepted and displayed on each screen of this model. All video formats are scaled to fit on screen in the highest resolution using a state of the art LSI that incorporates 4 x 4 pixel interpolations with precision Gamma correction to produce the best images available. Each screen is calibrated to SMPTE standards for gamma and color temperature.

- Two 7-inch 1.2 TFT-MegaPixel wide screens
- 100% digital processing
- High resolution scaling of all images
- Wide viewing radius - 130° horizontal and 120° vertical provides superior visibility when the viewer is not directly in front of the screen
- 380 candelas per square meter (cd/m²) luminance produces enhanced image quality in varying light and viewing conditions
- 400:1 ratio of contrast between black and white luminance values with response rates less than 30 ms results in excellent quality for moving images
- 4:3 and 16:9 screen aspect ratios for DTV applications in HD and SD formats
- Works with all SMPTE/ITU SDI/HD/SDI production formats and frame rates
- Blue Gun for color adjustment
- SD/HD digital signal indicators
- Built in Color Bars
- Easy to see three color tally indicators
- Ready to mount in 19" rack out of the box
- Standard Multiformat inputs:
 - HD/SDI (all formats & frame rates)
 - 1080-24P, 25P, 30P, 50i, 60i
 - 720-24P, 25P, 30P, 50P, 60P
 - SDI (ITU-R BT601 format-525i, 625i)
 - Re-clocked and shaped output of all input signals